



Hot Tub Maintenance Schedule

DAILY

SHOCK WATER - *after each use*



Oxy-Spa Non-Chlorine Oxidizing Shock

1 - 2 Tablespoons per 250 Gallons

TEST CHLORINE LEVELS



Dichlor Spa Sanitizing Granules

Chlorine: 3.0 - 4.0 ppm

WEEKLY *BI-WEEKLY WITH CLEANWATER BLUE SANITIZER*

TEST LEVELS - *depending on sanitizer*

pH: 7.2 - 7.6

Total Alkalinity (TA): 80 - 120 ppm

Calcium Hardness: 150 - 300 ppm

Total Dissolved Solids TDS: 500 - 2,000 ppm

Bromine: 3.0 - 5.0 ppm *(If using Bromine system)*

Copper: 0.5 - 1.0 ppm *(If using Cleanwater Blue system)*

Salinity: 2,000 - 3,000 ppm *(If using Saltwater system)*

Stabilizer (CYA): 30 - 50 ppm *(If using Chlorine system)*

MONTHLY


RINSE FILTERS

Rinse filters to remove debris with hose sprayer nozzle.



APPLY 303 AEROSPACE PROTECTANT

Apply **303 Protectant** to spa cover and headrests.

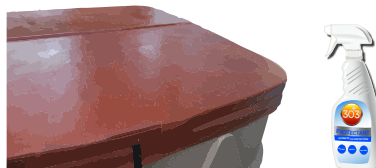

QUARTERLY

DEEP-CLEAN PLUMBING

Remove filter, use 8 oz **Spa System Flush**, run jets overnight and drain dirty spa water.

CLEAN SHELL

Use **CleanAll** with non-abrasive sponge and rinse.

DEEP CLEAN & ROTATE FILTERS

Add 1/2 cup **PowerSoak** to 5 gallon bucket, and submerge filter(s) allow to soak overnight. Rinse filter and allow to dry before placing back in hot tub.

REFILL SPA

Per spa manufacturer's guidelines.

YEARLY

REPLACE FILTERS

Hot tub filters should be replaced annually to maintain optimum efficiency.

REPLACE UV BULB

Annual **UV-C Sanitizer Bulb** replacement assures proper UV dosage to keep spa water crystal clear.

TEST OZONATOR

Use an **Ozone Test Kit**, even if ozone generator is making air bubbles, test each year for effectiveness. Replace ozonator every 3 - 5 years.